

FIG. 1

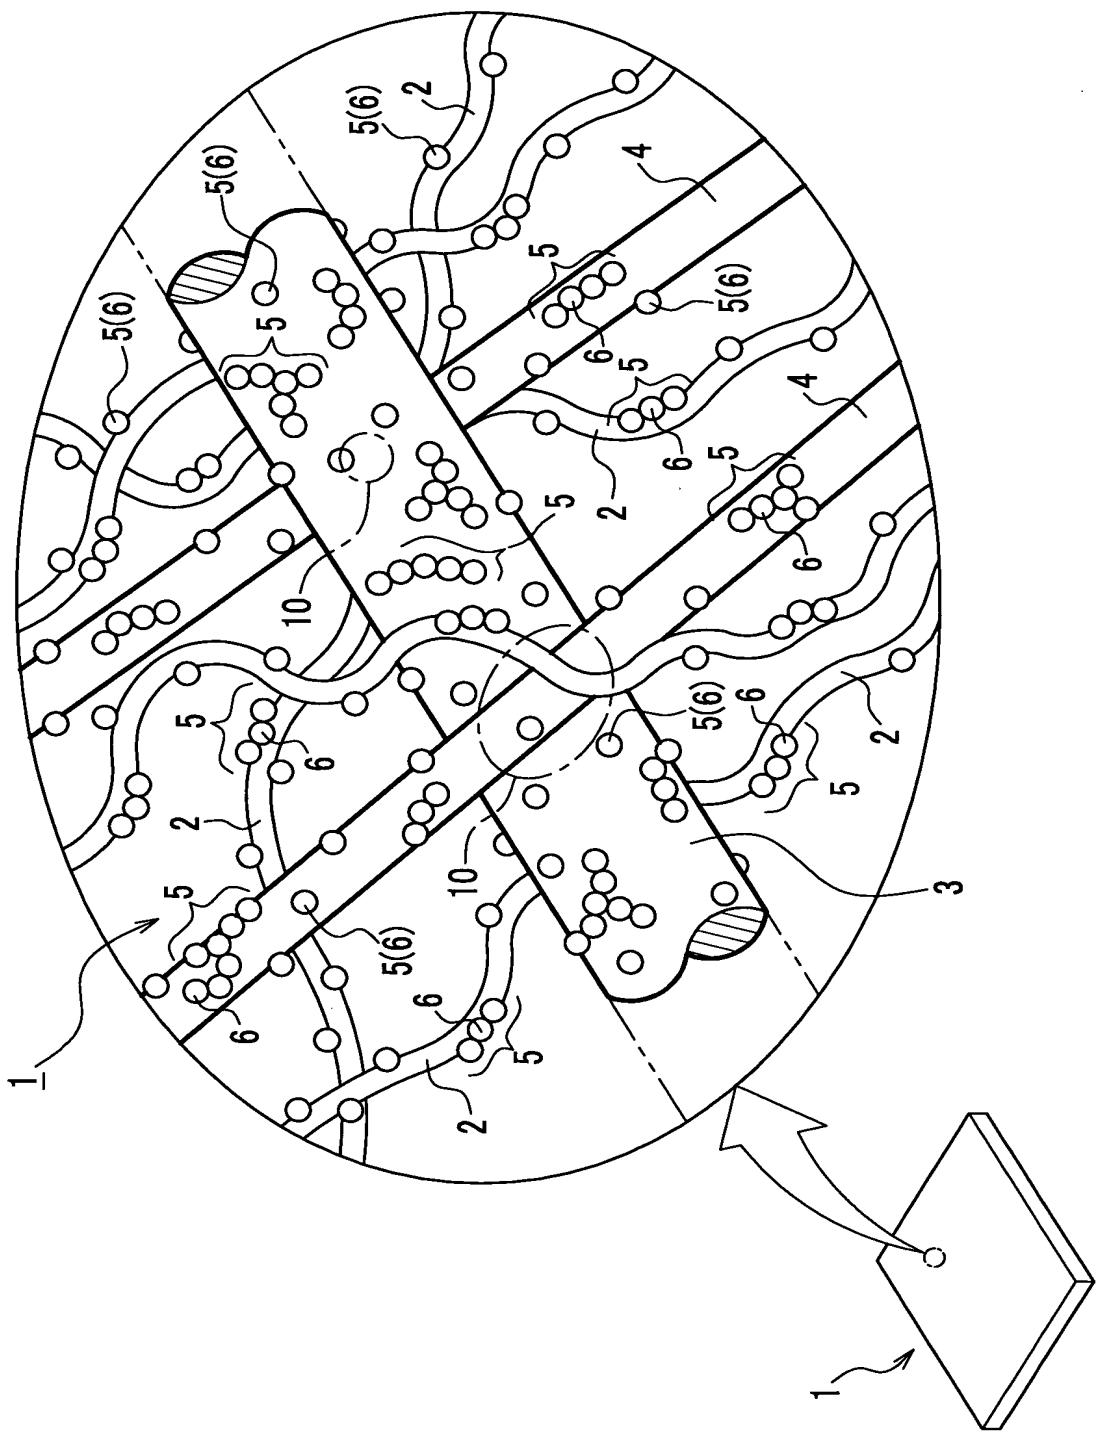


FIG. 2

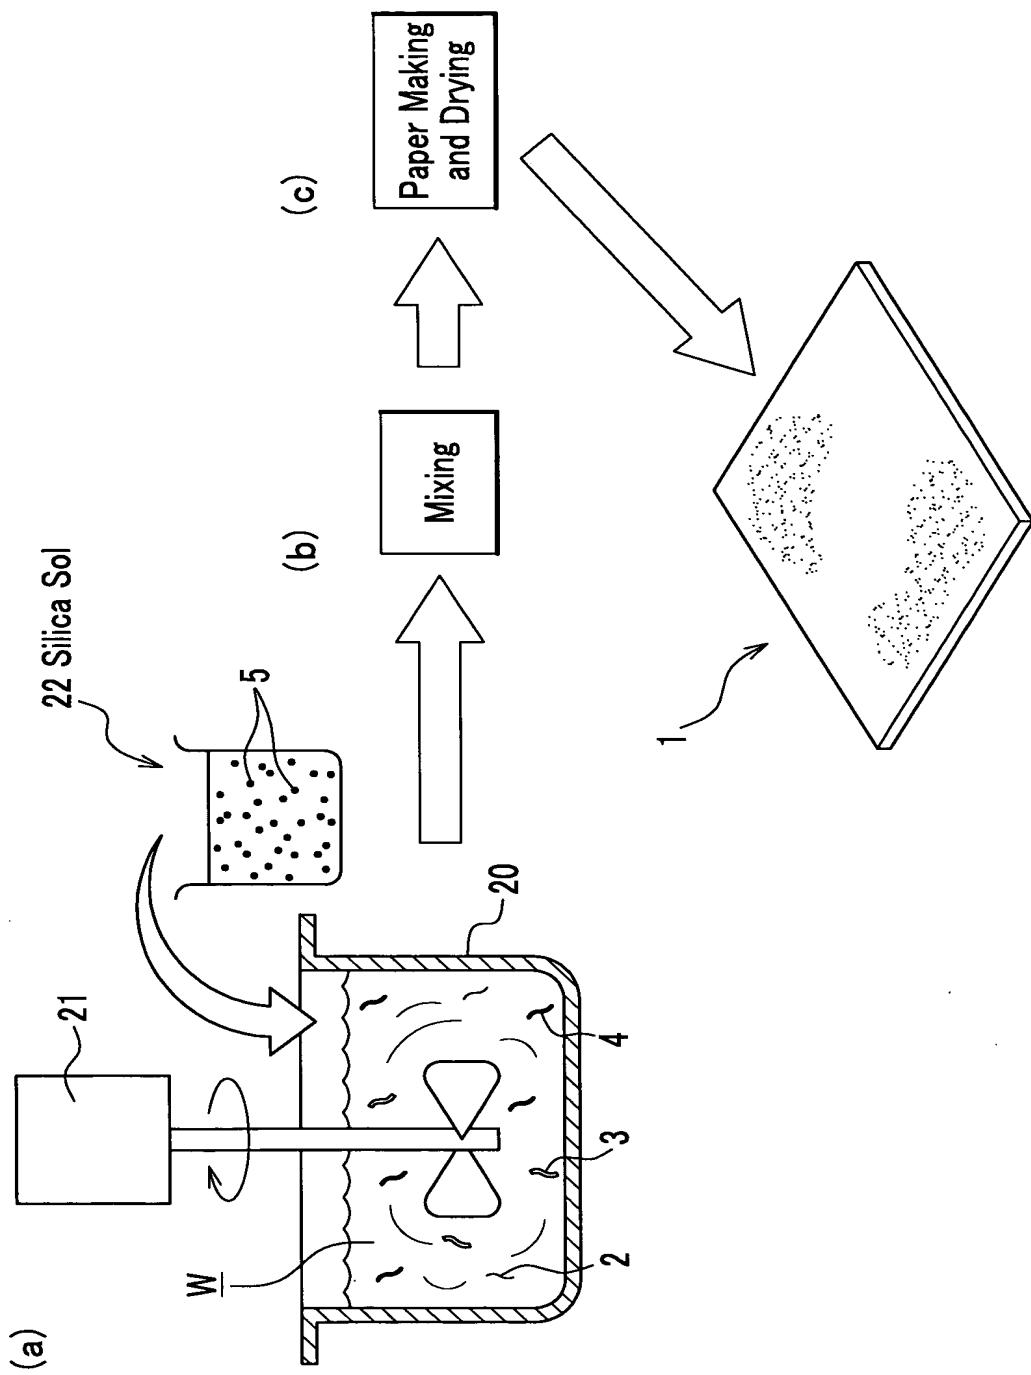


FIG. 3

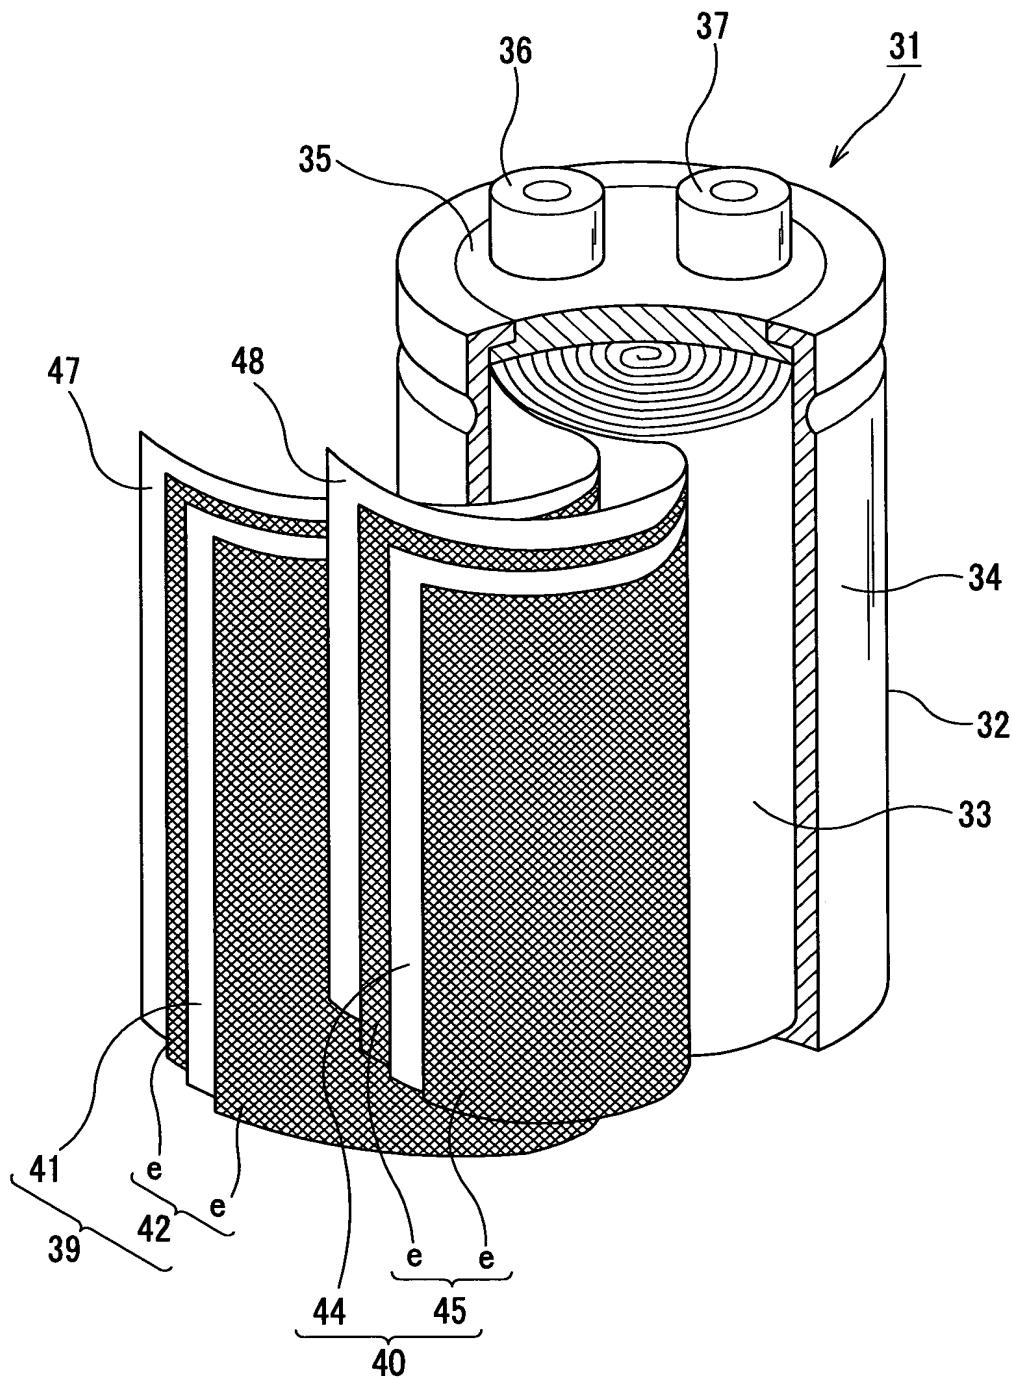


FIG. 4

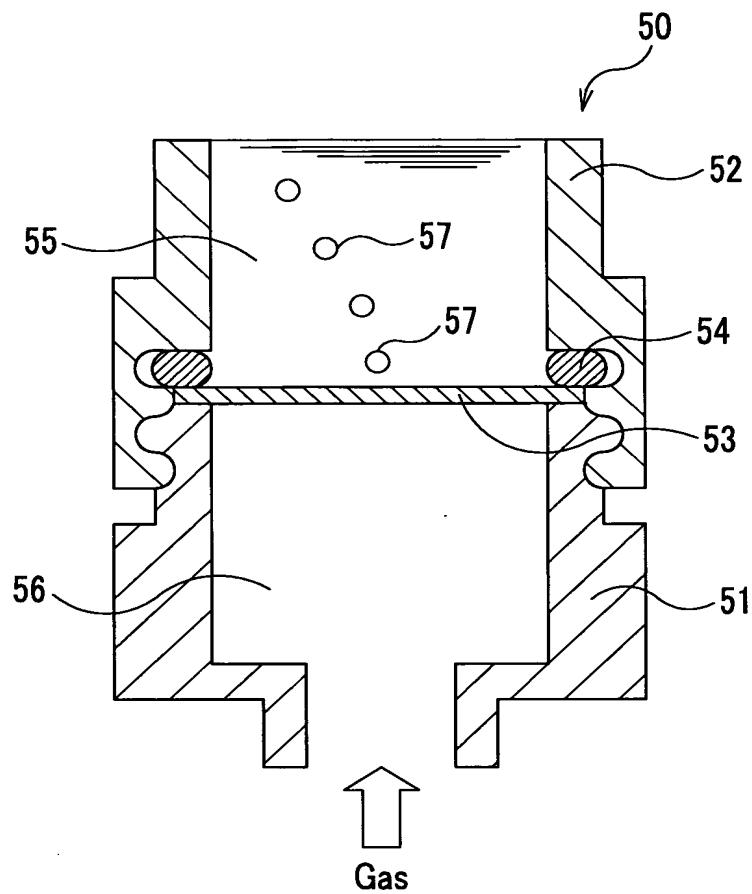


FIG. 5
PRIOR ART



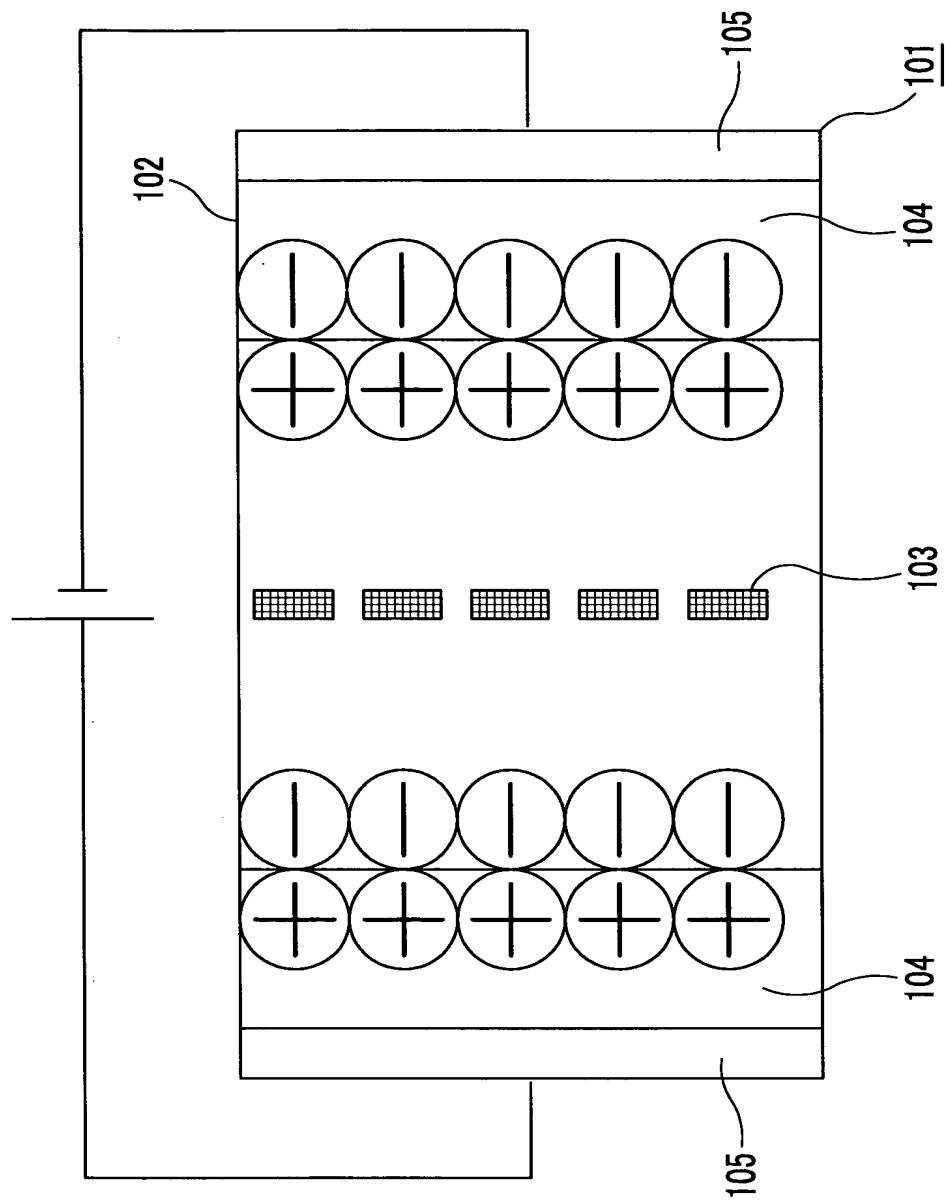


FIG. 6

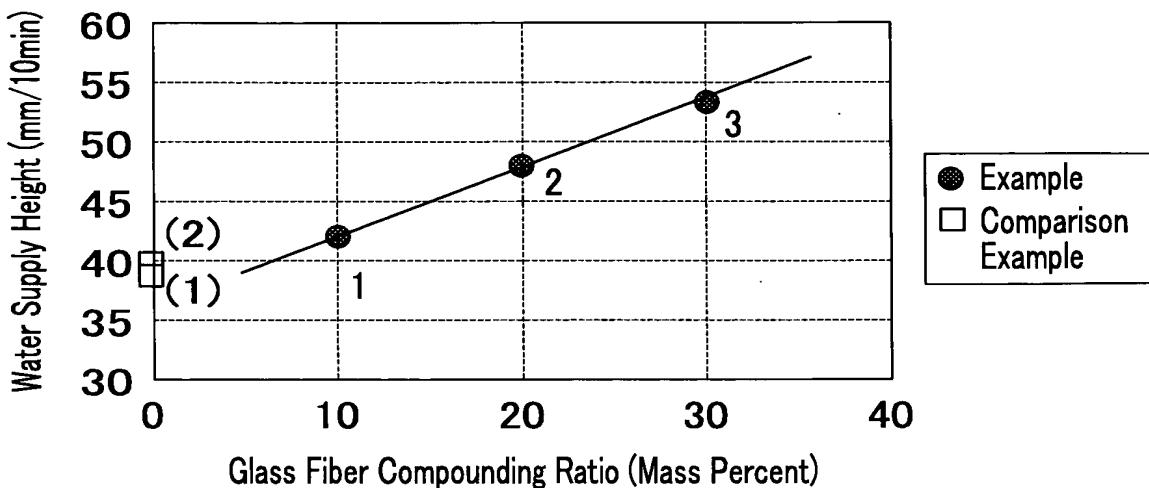


Polyester Fiber (0.11 dtex × 3 mm), 30 mass percent constant; and
Surface Density, 15 g/m² constant for All

FIG. 7

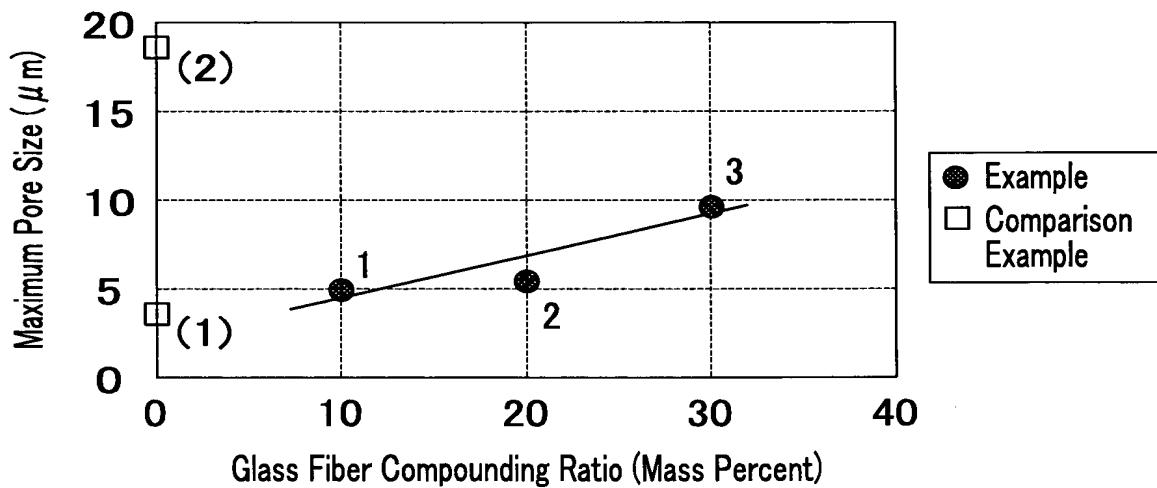


Polyester Fiber (0.11 dtex × 3 mm), 30 mass percent constant; and
Surface Density, 15 g/m² constant for Comparison Examples

FIG. 8

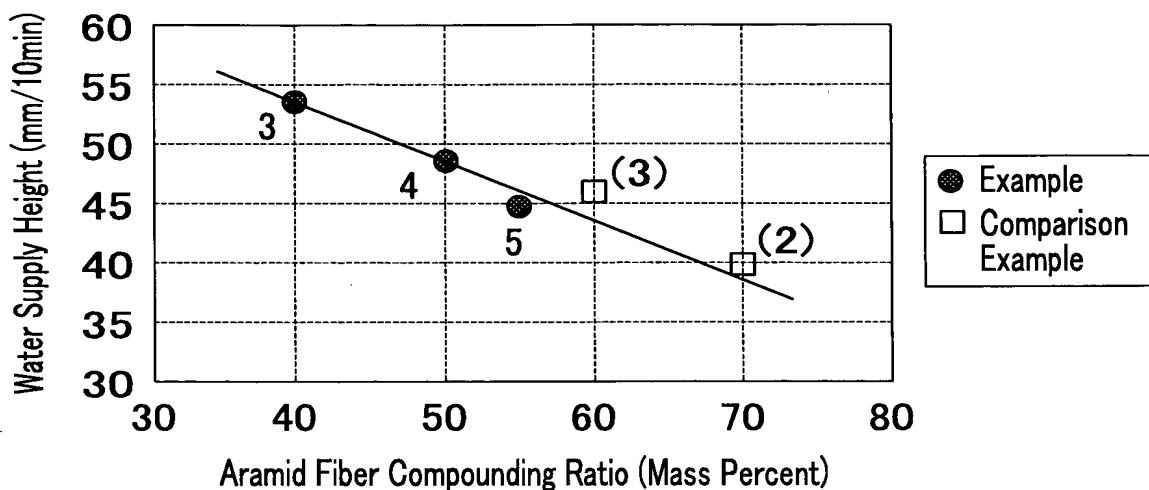


Glass Fiber (0.8 μ m), 30 mass percent constant for Examples;
Polyester Fiber (0.11 dtex \times 3 mm), 15 to 30 mass percent; and
Surface Density, 15 g/m² constant for All

FIG. 9

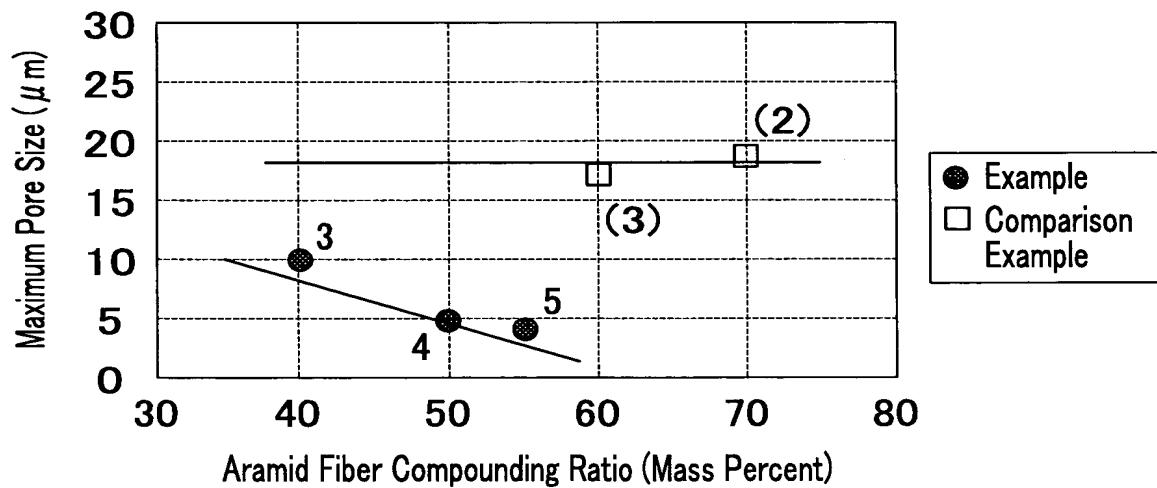


Glass Fiber (0.8 μ m), 30 mass percent constant for Examples;
Polyester Fiber (0.11 dtex \times 3 mm), 15 to 30 mass percent; and
Surface Density, 15 g/m² constant for All

FIG. 10

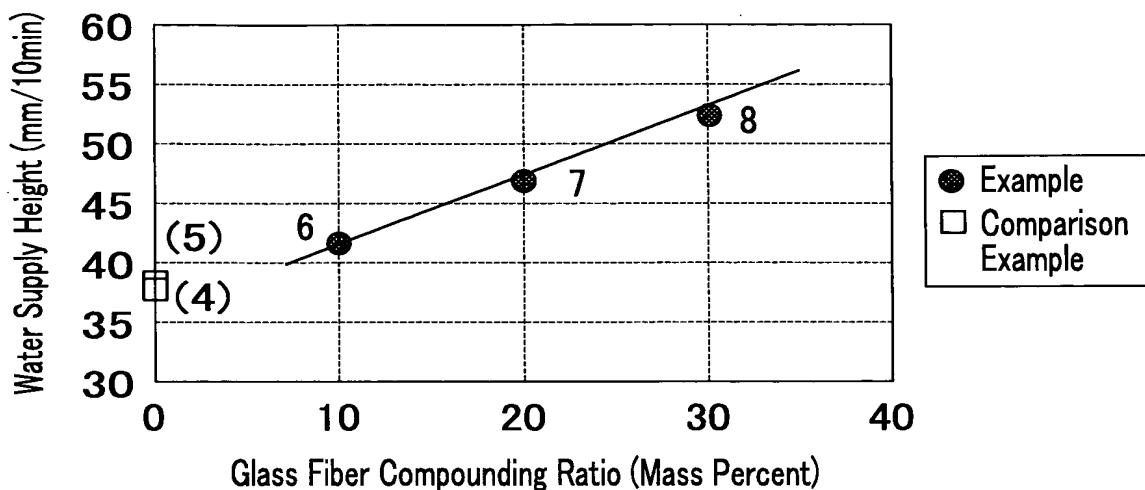


Polyester Fiber (0.22 dtex \times 3 mm), 30 mass percent constant; and
Surface Density, 15 g/m² constant for Examples

FIG. 11

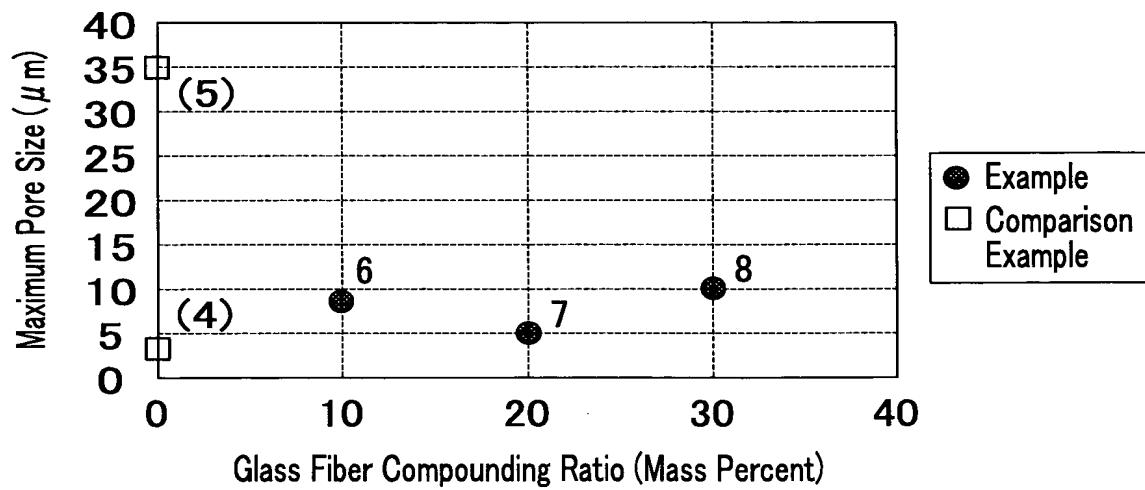


Polyester Fiber (0.22 dtex \times 3 mm), 30 mass percent constant; and
Surface Density, 15 g/m² constant for Examples

FIG. 12

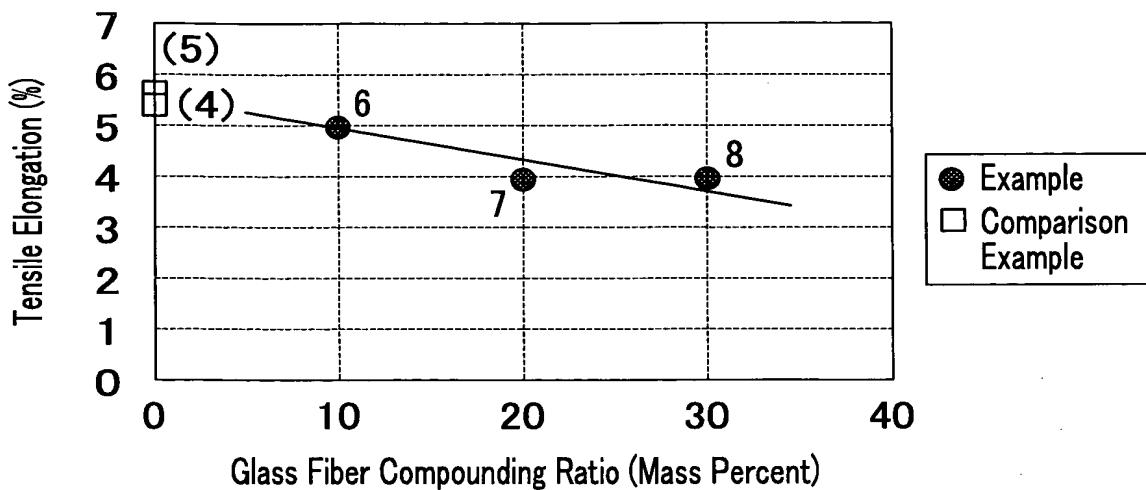


Polyester Fiber (0.22 dtex \times 3 mm), 30 mass percent constant; and
Surface Density, 15 g/m² constant for Examples

FIG. 13

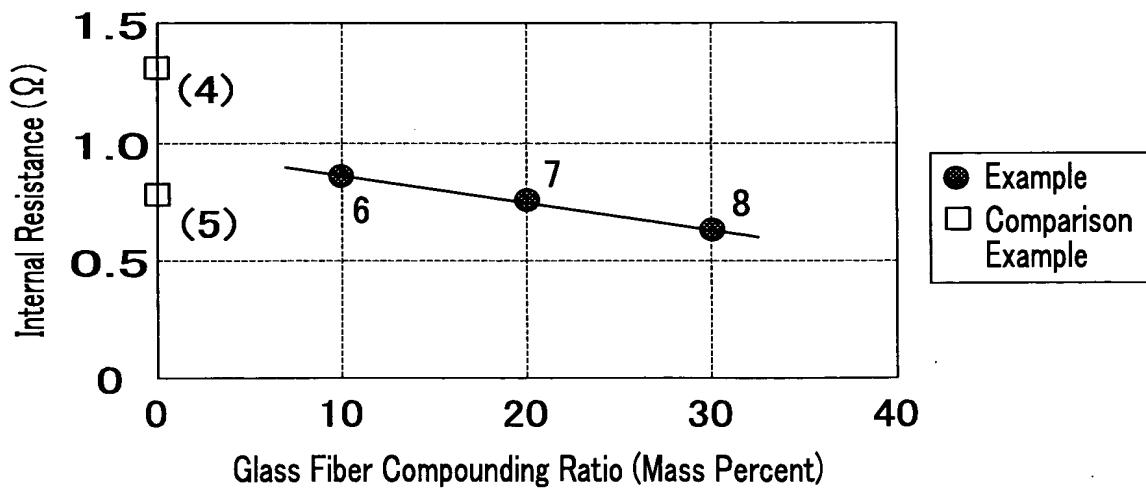


Polyester Fiber (0.22 dtex \times 3 mm), 30 mass percent constant; and
Surface Density, 15 g/m² constant for Examples

FIG. 14

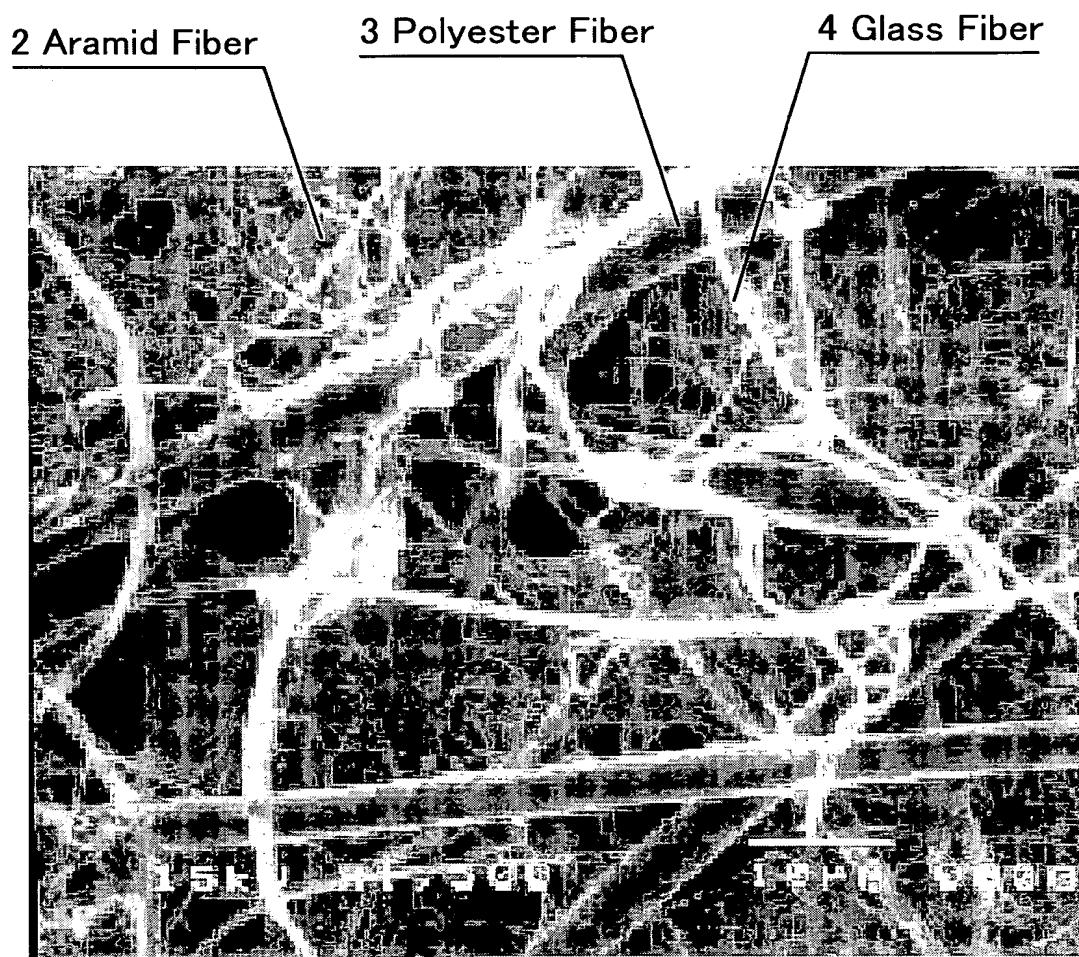


BEST AVAILABLE COPY

FIG. 15

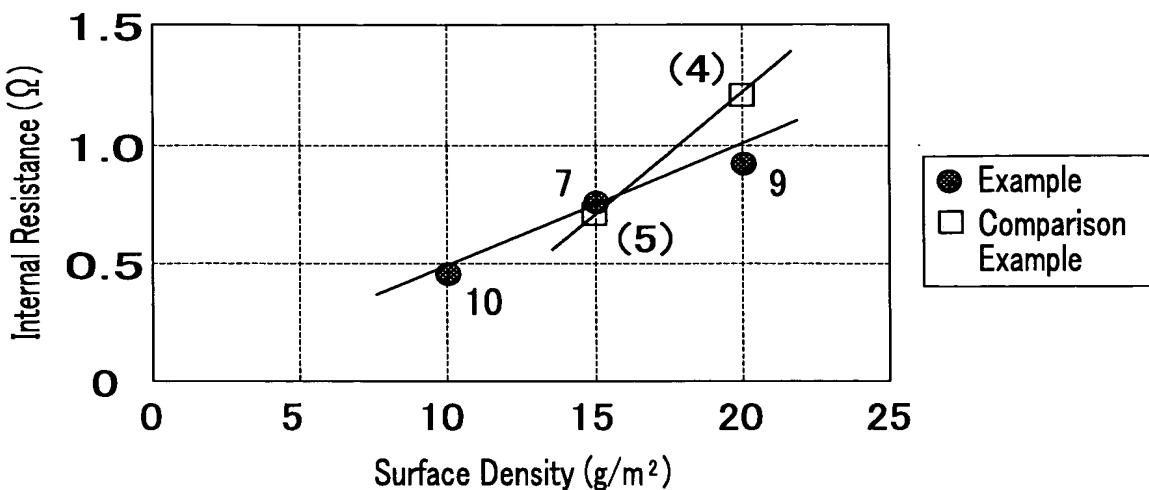


Glass Fiber (0.8 μm), 20 mass percent constant for Examples; Aramid Fiber, 50 mass percent for Examples and 70 mass percent for Comparison Examples; and Polyester Fiber (0.22 dtex \times 3 mm), 30 mass percent constant for All

FIG. 16

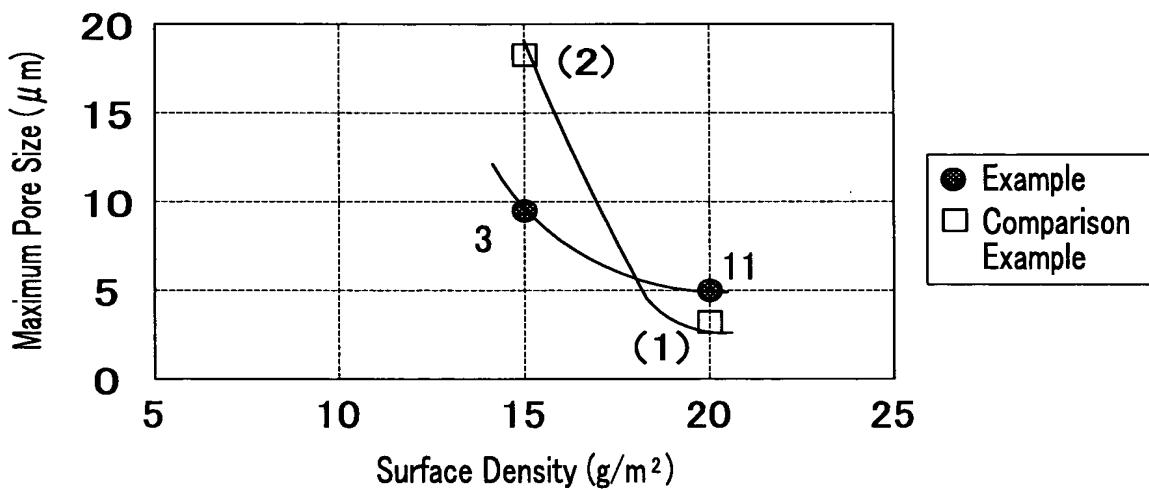


Glass Fiber (0.8 μm), 30 mass percent constant for Examples; Aramid Fiber, 40 mass percent for Examples and 70 mass percent for Comparison Examples; and Polyester Fiber (0.11 dtex \times 3 mm), 30 mass percent constant for All

FIG. 17

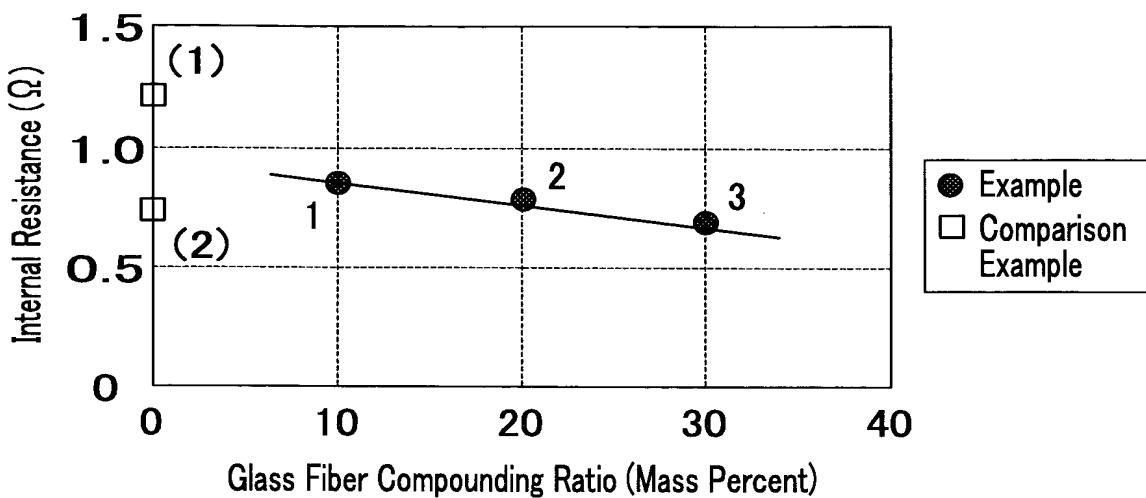


Polyester Fiber (0.11 dtex \times 3 mm), 30 mass percent constant; and
Surface Density, 15 g/m² constant for Examples

FIG. 18

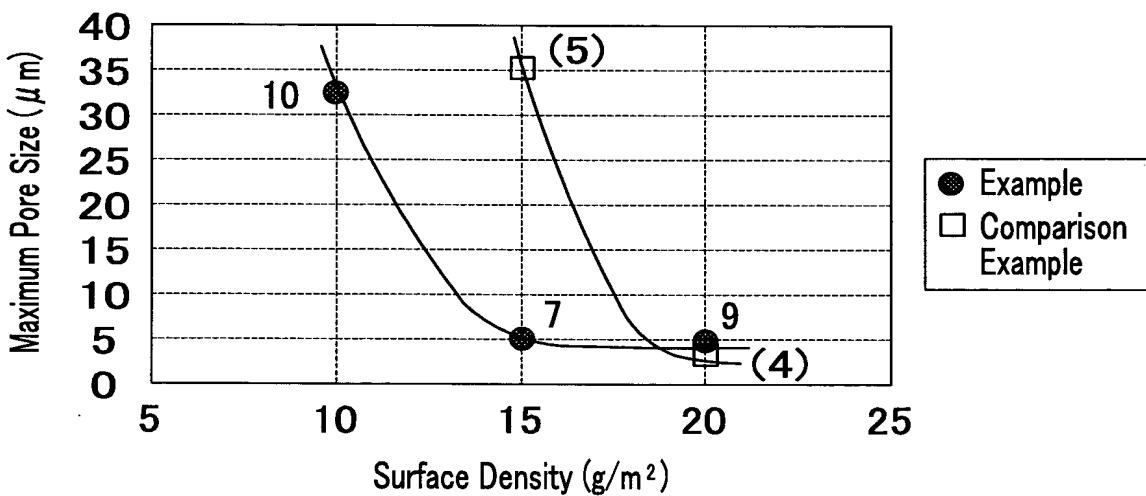

Glass Fiber (0.8 μm), 20 mass percent constant for Examples; Aramid Fiber,
50 mass percent for Examples and 70 mass percent for Comparison Examples; and
Polyester Fiber (0.22 dtex \times 3 mm), 30 mass percent constant for All

FIG. 19

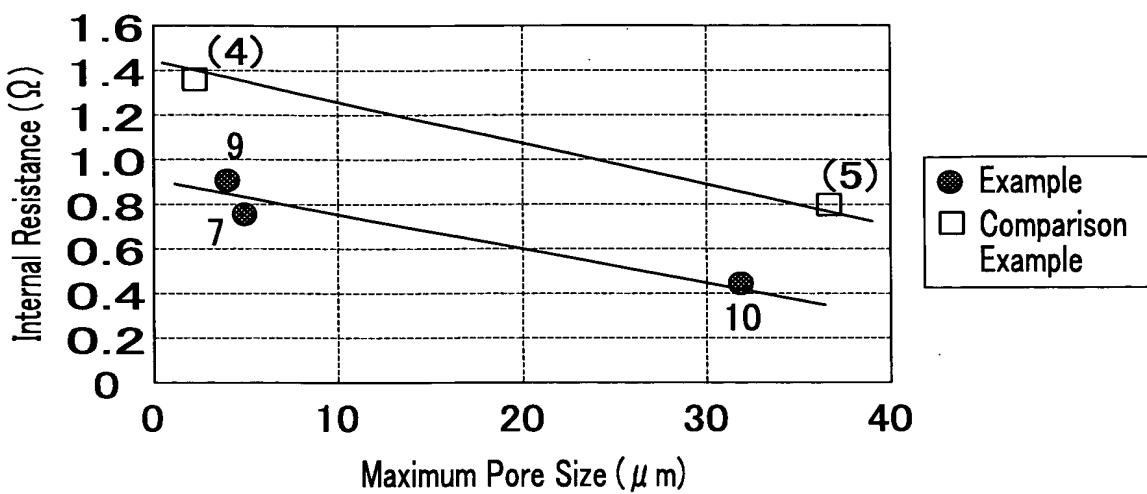

Glass Fiber (0.8 μm), 20 mass percent constant for Examples; Aramid Fiber, 50 mass percent for Examples and 70 mass percent for Comparison Examples; and Polyester Fiber (0.22 dtex \times 3 mm), 30 mass percent constant for All

FIG. 20

